



**TRIMBOX<sup>®</sup>**  
**WORKSTATION**



**WARNING:**  
**WHEN THE MACHINE**  
**IS RUNNING:**

- Never place your fingers or the gloves or any other body part in contact with the grate or the blade.
  - Never apply pressure on the grate.
  - Do not use scissors, knives or any instrument above the grate.
  - Safety glasses and gloves are required at all time. The gloves have to be tight enough so they don't get inside the grate slots.
- A loose glove is dangerous, beware!

## USER'S INSTRUCTIONS

- 1- Read carefully the security instructions (see Warnings  above) before using the machine.
- 2- Install the four legs and use the four bolts supplied to tighten the legs to the structure.
- 3- Place the Trimbox (without grate) under the Trimbox Workstation and install it using the 3 bolts (already installed on the Trimbox) and the nylon nuts supplied with the Trimbox.
- 4- To trim, separate the flowers from the branches and roll the flowers on the grate with the hands in a circular movement.
- 5- In order to facilitate the trimming, clean the grate frequently with soap. It has to be done when the machine is NOT running.

## INFORMATIONS OR ORDERS


Contact: [info@trimpro.ca](mailto:info@trimpro.ca)  
Call (Canada): +1-450-349-0811

To be used in accordance with all existing laws and regulations. The manufacturer does not accept any responsibility for damages caused to or by the Trimbox Workstation, resulting from an inadequate use or assembly.


Patent : CAN : 2.470.370 USA : 7.168.643 Patent pending :  
EUR: 04761713.9 AUS: 2004269786 CE Standard

**www.trimpro.ca**

Remove  
the grate  
before  
installing




Install Trimbox under the structure

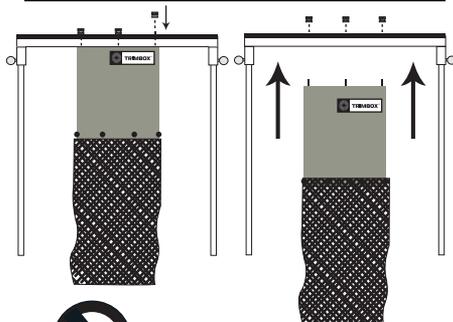

**WARNING**

**Do not remove the blade**  
**from the hub.**



## SHARPENING

- 1- Put off the set screw located in the hole on the side of the aluminum hub where the blade is fixed.
- 2- Put off the blade and the hub in one piece from the motor shaft.
- 3- Clean the blade with alcohol.
- 4- Use a grindstone.
- 5- Put a gentle pressure with the top of the blade on the grindstone with the sharpening angle desired.
- 6- Pass the blade on the grindstone with a movement from left to right and from right to left until the blade is properly sharpened.
- 7- Repeat the operation with the bottom of the blade.
- 8- Put back the blade and the aluminum hub on the motor shaft.
- 9- Put back in position the set screw in the hole on the side of the aluminum hub.