





The Twister T2 Trimmer. Trim More. Faster.

The Twister is the world's fastest leaf trimmer, equipped with the industry's most powerful vacuum along with proprietary blade geometry to deliver the closest cut possible without damaging your product.

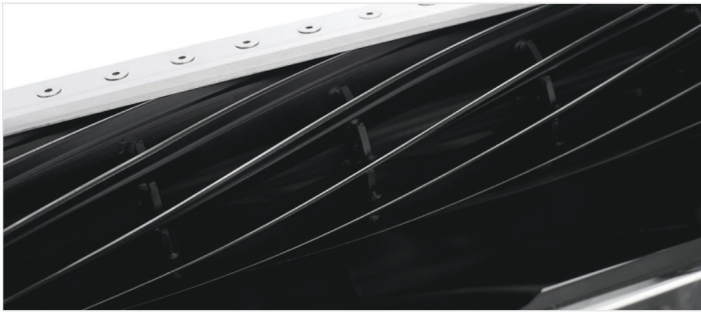

Extremely Fast

11 StaySharp™ self-sharpening blades are maintenance-free and perform 19,250 cuts every 60 seconds.

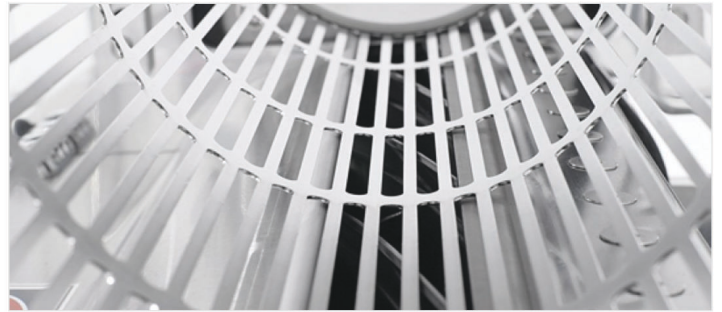

Consistent Cut

Trimmed pieces are of uniform quality, hour after hour; day after day.



Low Maintenance

No paint to chip or flake; strips down for complete cleaning access in less than 10 seconds with no tools; fully serviceable by end-user.



Easy to Clean

Watertight electrical and motors allow for complete high-pressure washdown.



QuickClick™ Technology

Ensures ultra fast, extremely precise blade adjustment (.0009" / .023mm per click)



Double the Speed

Designed for back-to-back tandem use, for even greater performance gains.

Images	Specifications
--------	----------------

TWISTER T2 TRIMMER

Input Voltage	220V/240V
Current Draw	8A
Blade Motor	1HP, Fan Cooled, Stainless
Tumbler Motor	1/30HP, Epoxy Coated, Watertight
Cut Height	.040" / 1/25 / 1mm
Weight	215lbs / 97.5kg
Shipping Weight (complete w/leaf collector)	420lbs / 190kg
Length	42.5in / 107.9cm
Width, with wheels	27.5in / 69.9cm
Width, without wheels	20.5in / 52.2cm
Height	32.5in / 82cm
Height without wheels	30.5in / 76cm
Discharge	6" / 152mm

TWISTER T2 LEAF COLLECTOR

Input Voltage	220V/240V
Motor	2HP, UL & CSA Approved, Fan Cooled
Amps (running)	9A
Amps (startup)	45A
Motor Speed	3450RPM
Airflow Capacity	1700CFM
Static Pressure	10.5in of H2O
Impeller	12" / 305mm, Balanced Aluminum
Inlet	6" / 153mm
Height	36in / 91.5cm
Weight	123lbs / 56kg
Circuit Breaker Required	15A / 240V
Connector (plug)	15A 240V (CEE 7/7)
Sound Rating	80 db
Fused	Yes
Filter Bag	1 – 80 Micron
Collection Bag	3 – 6 Mil
Generator Requirement	10000W (15000W surge) MINIMUM Extension Cord Gauge: 12AWG MINIMUM Extension Cord Length: 25' / 7.6m MAXIMUM*** Failure to meet these min. requirements can cause damage
Replacement Parts	Bag Clamps, Filter Bags, Collection Bags
Maintenance	Clean impeller housing frequently. Replace filter bag.
Part #	23-0117